

S-72.3275 Cellular Radio Network Planning and Optimization

Exercise Set 1

Deadline: 5.2.2008 at 16.00


Spreading and Modulation 1

A direct sequence spread-spectrum system is used to resolve the multipath signal in a two-path radio signal propagation scenario. If the path length of the secondary path is 300 m longer than that of the direct path, determine the minimum chip rate necessary to resolve the multipath components. How would WCDMA cope with the situation?

resolve the multipath signal in a two-path radio signal propagation scenario. If the path length of the secondary path is 300 m longer than that of the direct path, determine the minimum chip rate necessary to resolve the multipath components. How would WCDMA cope with the situation?

Spreading and Modulation 2

Consider the uplink of a CDMA system with two synchronous users received as shown in picture below.

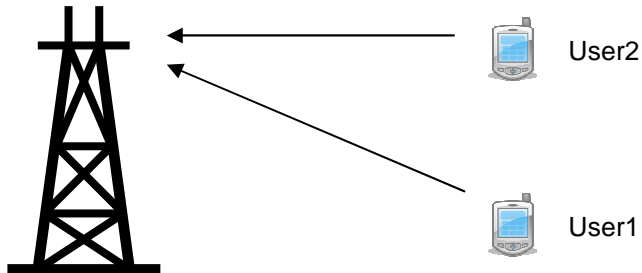

User 1 spreads its bipolar data signal $d_1 = \{-1, +1\}$ with the sequence $C_1 = [-1 -1 -1 +1 -1 +1 +1 +1]$.

User 2 spreads its data signal $d_2 = \{-1, +1\}$ with the sequence $C_2 = [+1 +1 -1 +1 +1 -1 -1 -1]$.

The received values for the chips of the first bit are $y = [0.0 -2.2 0.0 0.0]$.

1. What is the spreading factor? What is the spreading gain in dB?
2. Are the sequences C_1 and C_2 orthogonal to each other?
3. Perform the despreading operation for the first bit of user 1. What is the estimated bit?
4. Perform the despreading operation for the first bit of user 2. What is the estimated bit?
5. Determine the SIR for user 1.
6. What would be the SNR if the distortion to user 1 would be thermal noise (instead of user 2) with the same power?

7. Why is there a difference between the SNR and the $eSIR$ values? What is the possible range of SIR values?

Spreading and Modulation 3

Consider the uplink of W-CDMA. Given a spreading factor of 64 for DPDCH and 256 for DPCCH, an information bitrate of 15.6 kbps (12.2 kbps + 3.4 kbps for data and control correspondingly), and a power ratio of 1/9 between control and data channel:

1. What is the symbol rate for DPDCH?
2. What is the spreading gain for DPDCH in dB?
3. What is the processing gain considering the whole transmission?
4. Give the relation between SNR, CINR and PG.
5. A practical task where you utilize your expertise gained from solving last four problems:

In our example now, a reliable signal reception requires $E_b/N_0 = 5$ dB. The properties of DPDCH and DPCCH remain the same. Assuming a noise floor of -103 dBm, what is the required signal strength of the whole signal at the Node B receiving end? Consider the signal as whole, do not separate data and control parts.

What is the required RX power of DPCCH?

Spreading and Modulation 4

Consider the uplink of a WCDMA system. There are 15 users transmitting information bits at a rate of 12.2 kbps. The required E_b/N_0 to achieve sufficient performance is 6 dB. All users are received with equal power of 1 mW. The thermal noise power at the receiver is 5 mW.

1. Determine the carrier-to-interferer-and-noise ratio $CINR$ at the receiver.
2. What is the processing gain?
3. Is the E_b/N_0 value sufficient?
4. What is the minimum receive power per user such that the required E_b/N_0 is satisfied? (still all users are received with the same power)
5. What is the maximum number of users that can be received with sufficient performance if an infinite receive power is allowed (pole capacity)?
6. How much should the processing gain be increased to allow for doubling the number of users?